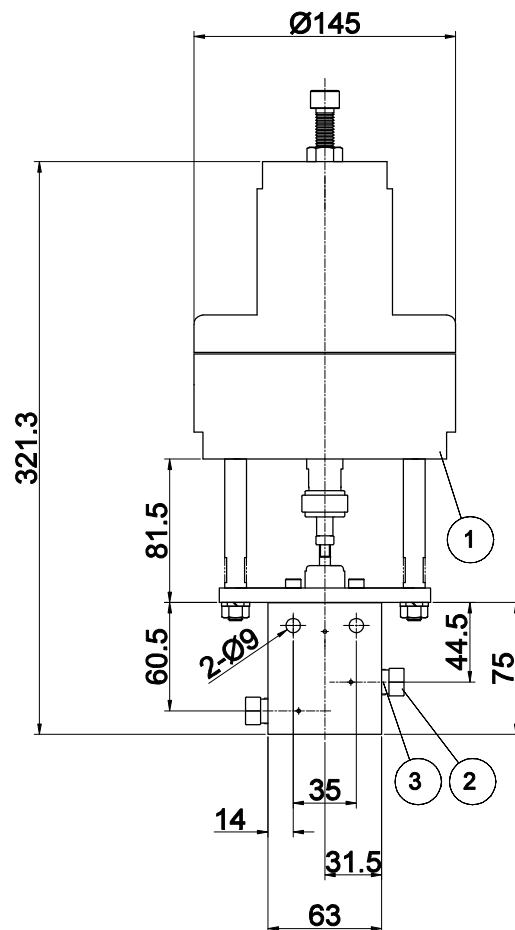



- SPECIFICATIONS

Catalog No.	Pressure Rating(PSI)	Port type	Orifice Size(Ø)	Material
AOV10CS08-S	10,000	H1008	Ø8.5	STS316CW

- Note

1. All dimensions for reference only and subject to change.

REV NO.	DESCRIPTION	DRAWING	REVIEWED BY	APPROVED BY
0	FOR APPROVAL	/		
DESIGN SECTION				

Website		Main site : http://www.hiflux.com Shopping mall : http://www.hifluxmall.com					
3	SLEEVE	10,000PSI 1/2"	FA10SS08	STS304CW	2	EA	-
2	GLAND	10,000PSI 1/2"	FA10GS08	STS304CW	2	EA	-
1	AOV ASS'M	10,000PSI 1/2"	AOV10CS08-S	-	1	EA	-
ITEM	NAME OF PART	SPEC	Catalog No.	MATERIAL	QUANTITY	UNIT	REMARK
PART CODE		DESCRIPTION		MATERIAL LIST FOR ONE SET			
No indication chamfer 0.2-0.4 X 45°		UNIT: MM		PROJECT			
General tolerance is given in KS B ISO 2768-1		CLASS OF FINISH		TITLE			
NOMINAL DIM.(MM)		OVER UNDER TOL.		NORMAL CLOSE A.O.V			
0.5	6	±0.1	✓ = 200S, ~	10,000PSIG 1/2" STRAGHT			
6	30	±0.2	✓ = 12S, ~	AOV10CS08-S			
30	120	±0.3	✓ = 12S, ~	APPD BY CHD BY DED BY DRN BY WORK NO.			
120	315	±0.5	✓ = 12S, ~	K.Y.J K.Y.J K.Y.J K.Y.J HI-KYJ-220610-04			
315	1000	±0.8	✓ = 12S, ~	SCALE			
1000	2000	±1.2	✓ = 12S, ~	1:1			
OVER 2000		±1.5	✓ = 12S, ~	DRN DATE			
				08, 2022			
				DWG NO.			
				AOV10CS08-S			
				REV. NO.			
				0			
				HIFLUX®			