
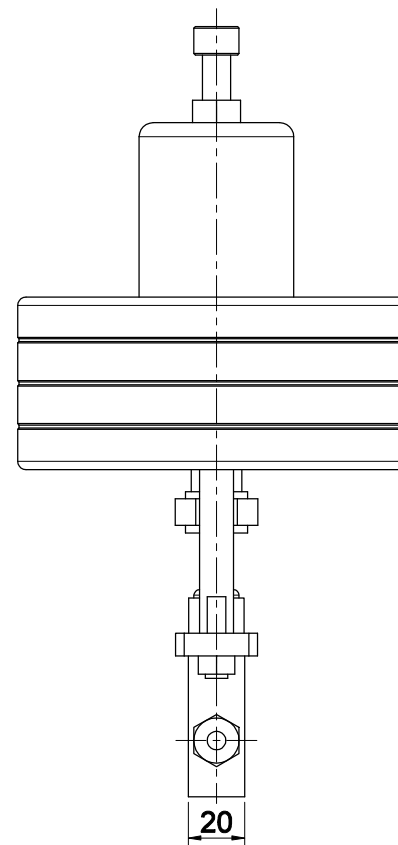
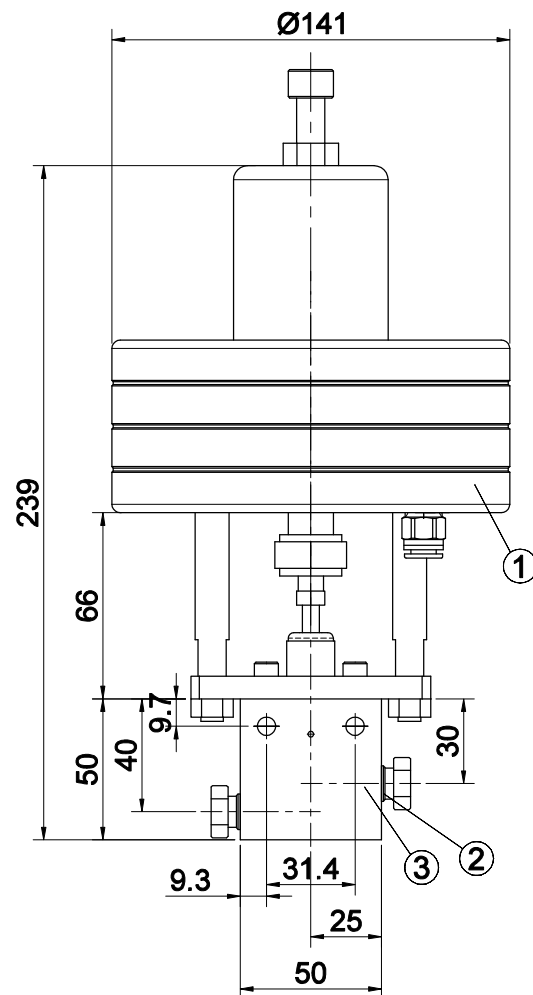




- SPECIFICATIONS

Catalog No.	Pressure Rating(PSI)	Port type	Orifice Size(Ø)	Material
AOV15CS04-S	15,000	H1504	Ø3.2	STS316CW

- Note

1. All dimensions for reference only and subject to change.

REV NO.	DESCRIPTION	DRAWING	REVIEWED BY	APPROVED BY
0	FOR APPROVAL	/		
DESIGN SECTION				

Website		Main site : http://www.hiflux.com Shopping mall : http://www.hifluxmall.com					
3	SLEEVE	15,000PSI 1/4"	FA15SS04	STS316CW	2	EA	-
2	GLAND	15,000PSI 1/4"	FA15GS04	STS316CW	2	EA	-
1	ASSM	15,000PSI 1/4"	AOV15CS04-S	-	1	EA	-
ITEM	NAME OF PART	SPEC	Catalog No.	MATERIAL	QUANTITY	UNIT	REMARK
PART CODE		DESCRIPTION		FOR ONE SET			
MATERIAL LIST FOR ONE SET							
No indication chamfer 0.2~0.4 X 45°		UNIT: MM		PROJECT			
General tolerance is given in KS B ISO 2768-1		 		TITLE			
NOMINAL DIM.(MM)		CLASS OF FINISH		NORMAL CLOSE A.O.V			
OVER	UNDER	TOL.		15,000PSIG 1/4" STRAGHT			
0.5	6	±0.1	✓ = 20S, ~	AOV15CS04-S			
6	30	±0.2	W = 12S, ▽	APPD BY			
30	120	±0.3	X = 12S, ▽	CHD BY			
120	315	±0.5	Y = 12S, ▽	DED BY			
315	1000	±0.8	Z = 12S, ▽	DRN BY			
1000	2000	±1.2	Z = 12S, ▽	SCALE			
OVER 2000		±1.5	Z = 12S, ▽	1:1			
				DRN DATE		DWG NO.	
				07, 2024		AOV15CS04-S	
				REV. NO.			
				0			
				HIFLUX®			