
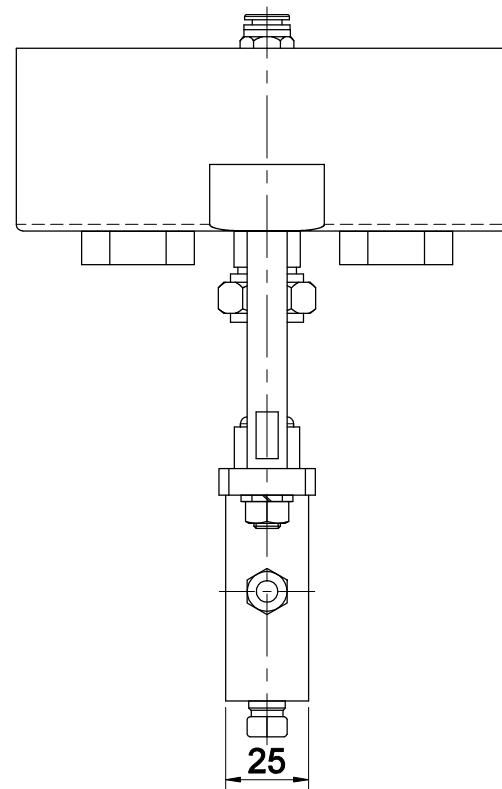
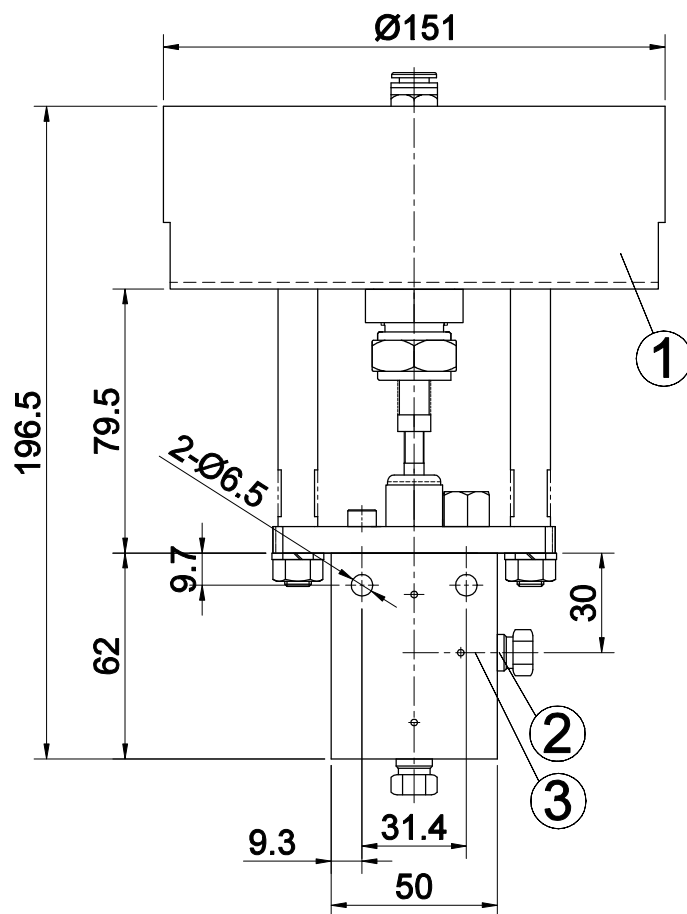




- SPECIFICATIONS

Catalog No.	Pressure Rating(PSI)	Port type	Orifice Size(Ø)	Material
AOV20OS04-A	20,000	H2004	Ø3.2	STS316CW

- Note

1. All dimensions for reference only and subject to change.

REV NO.	DESCRIPTION	DRAWING	REVIEWED BY	APPROVED BY
0	FOR APPROVAL	/		

Website		Main site : http://www.hiflux.com Shopping mail : http://www.hifluxmall.com					
3	COLLAR	20,000PSI 1/4"	FA20RS04	STS316CW	2	EA	-
2	GLAND	20,000PSI 1/4"	FA20GS04	STS316CW	2	EA	-
1	A.O.V	20,000PSI 1/4"	AOV20OS04-A	STS316CW	1	EA	-
ITEM	NAME OF PART	SPEC	Catalog No.	MATERIAL	QUANTITY	UNIT	REMARK
	PART CODE				FOR ONE SET		
MATERIAL LIST FOR ONE SET							
No indication chamfer 0.2~0.4 X 45°			UNIT: MM		PROJECT		
General tolerance is given in KS B ISO 2768-1					Normal Open Air Operating Valve Angle Type		
NORMINAL DIM.(MM)					TITLE		
OVER	UNDER	TOL	CLASS OF FINISH		20,000PSIG 1/4" ANGLE		
0.5	6	±0.1	✓ = √, 200S,		AOV20OS04-A		
6	30	±0.2	✓ = √, 50S,		APPROD BY		
30	120	±0.3	✓ = √, 12.5S,		CHD BY		
120	315	±0.5	✓ = √, 3.2S,		DET BY		
315	1000	±0.8	✓ = √, 0.8S,		DRN BY		
1000	2000	±1.2			WORK NO.		
OVER 2000		±1.5			HI-KYJ-200210-01		
					SCALE		
					1:1		
					DRN DATE		
					02, 2025		
					DWG NO.		
					AOV20OS04-A		
					REV. NO.		
					0		
					HIFLUX®		