
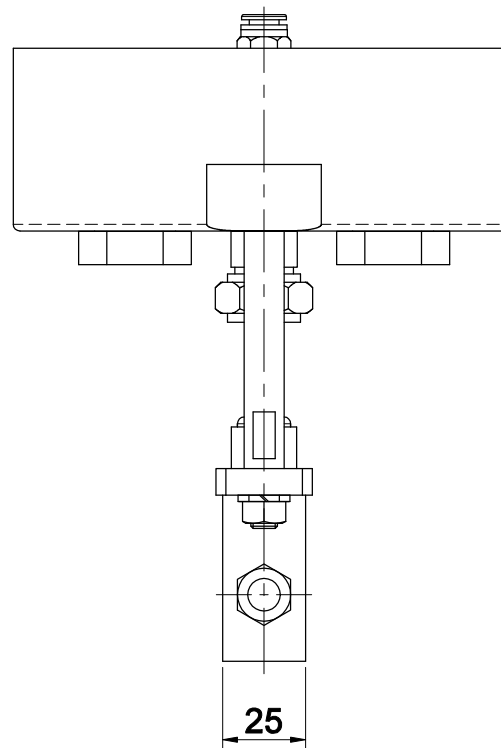
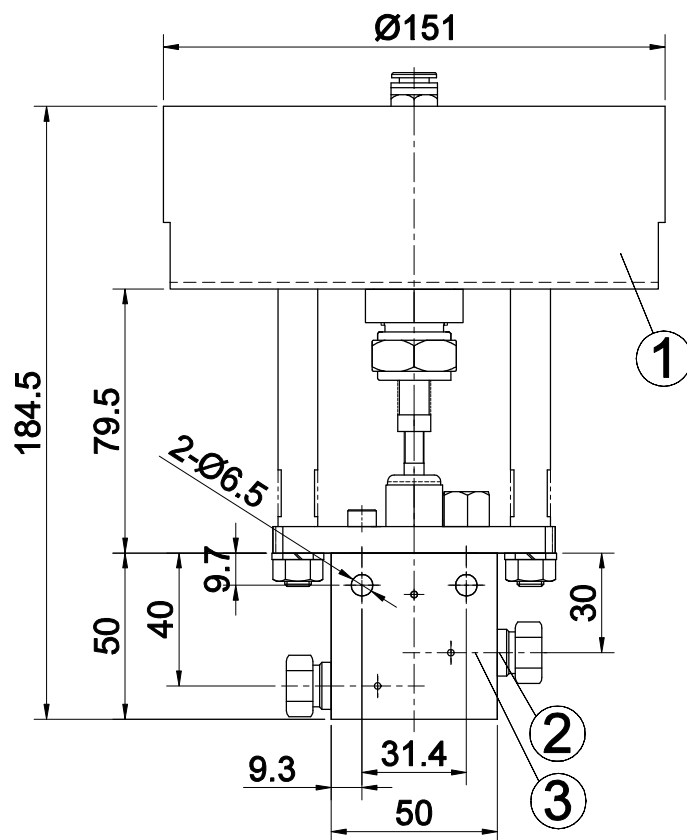




- SPECIFICATIONS

Catalog No.	Pressure Rating(PSI)	Port type	Orifice Size(Ø)	Material
AOV20OS06-S	20,000	H2006	Ø5.5	STS316CW

- Note

1. All dimensions for reference only and subject to change.

REV NO.	DESCRIPTION	DRAWING	REVIEWED BY	APPROVED BY
0	FOR APPROVAL	/		
DESIGN SECTION				

Website		Main site : http://www.hiflux.com Shopping mall : http://www.hifluxmall.com					
3	COLLAR	20,000PSI 3/8"	FA20RS08	STS316CW	2	EA	-
2	GLAND	20,000PSI 3/8"	FA20GS08	STS316CW	2	EA	-
1	A.O.V	20,000PSI 3/8"	AOV20OS06-A	STS316CW	1	EA	-
ITEM	NAME OF PART	SPEC	Catalog No.	MATERIAL	QUANTITY	UNIT	REMARK
	PART CODE		DESCRIPTION		FOR ONE SET		
MATERIAL LIST FOR ONE SET							
No Indication chamfer 0.2~0.4 X 45°			UNIT: MM		PROJECT		
General tolerance is given in KS B ISO 2768-1					Normal Open Air Operating Valve Straght Type		
NORMINAL DIM.(MM)					TITLE		
OVER	UNDER	TOL	CLASS OF FINISH		20,000PSIG 3/8" STRAGHT		
0.5	6	±0.1	✓ = √, 200S, ~		AOV20OS06-S		
6	30	±0.2	✓ = √, 50S, ▽		APPROD BY		
30	120	±0.3	✓ = √, 12.5S, ▽		CHD BY	DET BY	DRN BY
120	315	±0.5	✓ = √, 3.2S, ▽		KY.J	KY.J	KY.J
315	1000	±0.8	✓ = √, 0.8S, ▽		SCALE	DRN DATE	WORK NO.
1000	2000	±1.2			1:1	05, 2025	HI-KYJ-250514-01
OVER 2000		±1.5			DWG NO.	AOV20OS06-S	REV. NO.
					0		

HiFLUX®