
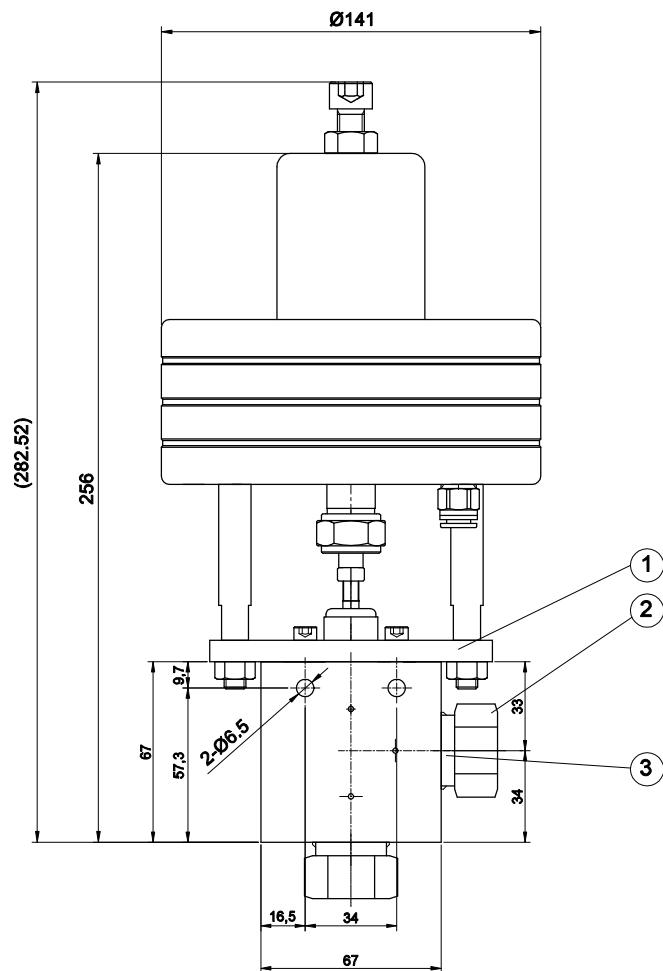




1. All dimensions for reference only and subject to change.

Website			Main site : http://www.hiflux.com Shopping mall : http://www.hifluxmall.com						
3	COLLOR	60,000PSI 9/16"	FA60RS09	STS304CW	2	EA	-		
2	GLAND	60,000PSI 9/16"	FA60GS09	STS304CW	2	EA			
1	A.O.V	60,000PSI 9/16"	AOV60CS09-A	STS316CW	1	EA			
ITEM	NAME OF PART	SPEC	Catalog No.	MATERIAL	QUANTITY	UNIT	REMARK		
PART CODE		DESCRIPTION		FOR ONE SET					
MATERIAL LIST FOR ONE SET									
No Indication chamfer 0.2-0.4 X 45°		UNIT: MM		PROJECT					
General tolerance is given in KS B ISO 2768-1				Air Operating Valve Angle Type					
NORMAL DIM.(MM)				TITLE					
		CLASS OF FINISH		60,000PSI 9/16"					
OVER	UNDER	TOL.		APP'D BY	CH'D BY	DET BY	DRN BY	WORK NO.	REV. NO. 
0.5	6	±0.1		L.S.J	L.S.J	L.S.J	L.S.J	H4LSJ-211027-01	
6	30	±0.2							
30	120	±0.3							
120	315	±0.5							
315	1000	±0.8							
1000	2000	±1.2							
OVER 2000		±1.5	SCALE		DRN DATE		DWG NO.		
			1:1		10, 2021		H4LSJ-211027-01		
									

Catalog No.	Pressure Rating(PSI)	Port type	Orifice Size(Ø)	Material	Block Thickness
AOV60CS09-A	60,000	H6009	2	STS316CW	38