
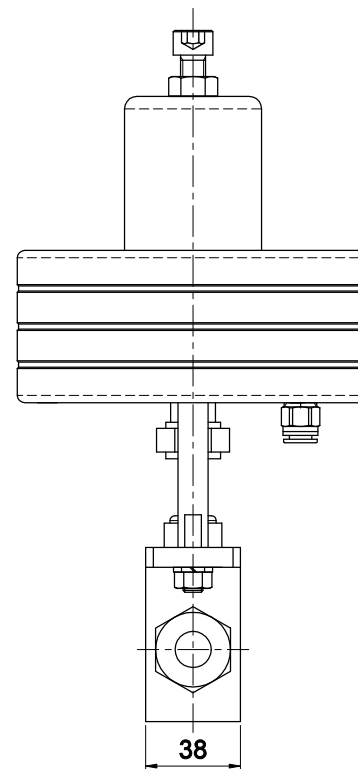
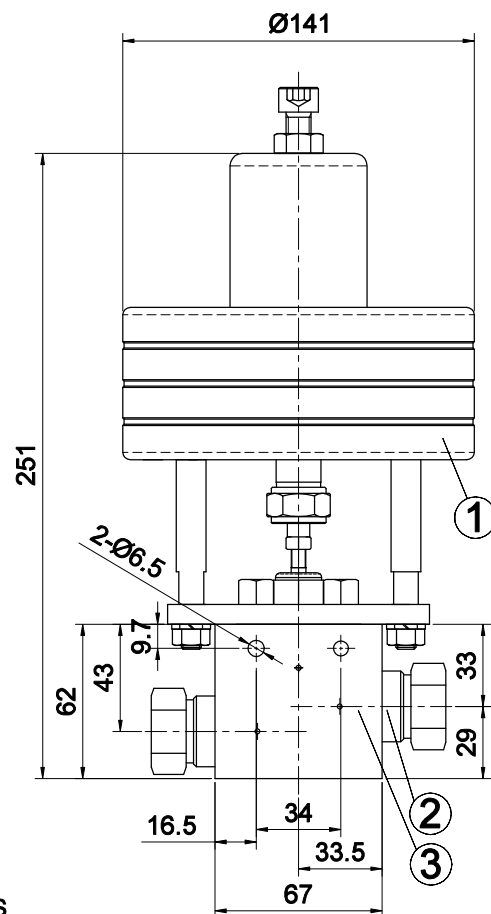




- SPECIFICATIONS

Catalog No.	Pressure Rating(PSI)	Port type	Orifice Size(Ø)	Material
AOV60CS09-S	60,000	H6009	Ø2	STS 316CW

- Note

1. All dimensions for reference only and subject to change.

REV NO.	DESCRIPTION	DRAWING	REVIEWED BY	APPROVED BY
0	FOR APPROVAL	/		

Website		Main site : http://www.hiflux.com Shopping mall : http://www.hifluxmall.com					
3	COLLOR	60,000psi 9/16"	FA80RS09	STS 316CW	2	EA	
2	GLAND	60,000psi 9/16"	FA80GS09	STS 316CW	2	EA	
1	A.O.V	60,000psi 9/16"	AOV60CS09-S	STS 316CW	1	EA	-
ITEM	NAME OF PART PART CODE	SPEC	Catalog No.	MATERIAL	QUANTITY FOR ONE SET	UNIT	REMARK
MATERIAL LIST FOR ONE SET							
No indication chamfer 0.2~0.4 X 45°			UNIT: MM		PROJECT		
General tolerance is given in KS B ISO 2768-1					Normal Open Air Operating Valve Straight Type		
NOMINAL DIM.(MM)					TITLE		
OVER	UNDER	TOL	CLASS OF FINISH		60,000PSIG 9/16" STRAIGHT		
0.5	6	±0.1	✓ = 100, 200S, ~		AOV60CS09-S		
6	30	±0.2	✓ = 125, 50S, ▽		APPROD BY		
30	120	±0.3	✓ = 150, 12.5S, ▽		CHD BY	DET BY	DRN BY
120	315	±0.5	✓ = 175, 3.2S, ▽		K.Y.J	K.Y.J	K.Y.J
315	1000	±0.8	✓ = 200, 0.8S, ▽		WORK NO.	H-KYJ-201110-01	
1000	2000	±1.2			SCALE	DRN DATE	DWG NO.
OVER 2000		±1.5			1:1	11, 2025	AOV60CS09-S

HIFLUX®