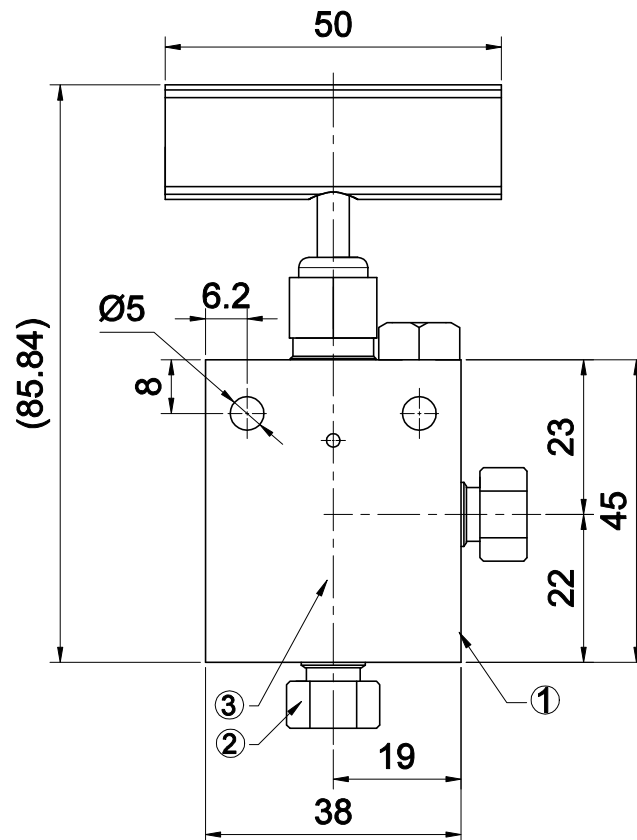




- SPECIFICATIONS

Catalog No.	Pressure Rating(PSI)	Port type	Orifice Size(Ø)	Material
NV15VS02-A	15,000	H1502	1.4	STS316CW

- Note

1. All dimensions for reference only and subject to change.

REV NO.	DESCRIPTION	DRAWING	REVIEWED BY	APPROVED BY
0	FOR APPROVAL	/		

Website		Main site : http://www.hiflux.com Shopping mall : http://www.hifluxmall.com						
3	SLEEVE	15,000PSI 1/8"	FA15S802	ST8316CW	2	EA	-	
2	GLAND	15,000PSI 1/8"	FA15G802	ST8316CW	2	EA	-	
1	NEEDLE VALVE	15,000PSI 1/8"	NV15VS02-A	-	1	EA	-	
ITEM	NAME OF PART	SPEC	Catalog No.	MATERIAL	QUANTITY	UNIT	REMARK	
PART CODE		DESCRIPTION		FOR ONE SET				
MATERIAL LIST FOR ONE SET								
No indication chamfer 0.2~0.4 X 45°		UNIT: MM		PROJECT LOW PRESSURE NEEDLE VALVE				
General tolerance is given in KS B ISO 2768-1				TITLE NEEDLE VALVE ANGLE				
NORMINAL DIM.(MM)		CLASS OF FINISH		15,000PSIG 1/8"				
OVER	UNDER	TOL	✓ = √, 200S, 	APPD BY	CHD BY	DET BY	DRN BY	
0.5	6	±0.1	✓ = √, 50S, 	KY.J	KY.J	KY.J	KY.J	
6	30	±0.2	✓ = √, 12.5S, 					
30	120	±0.3	✓ = √, 3.2S, 					
120	315	±0.5	✓ = √, 0.8S, 					
315	1000	±0.8						
1000	2000	±1.2						
OVER 2000		±1.5						
				SCALE 1:1		DRN DATE 03, 2023		
						DWG NO. NV15VS02-A		
						REV. NO. 0		
								
				HIFLUX®				

HIFLUX®