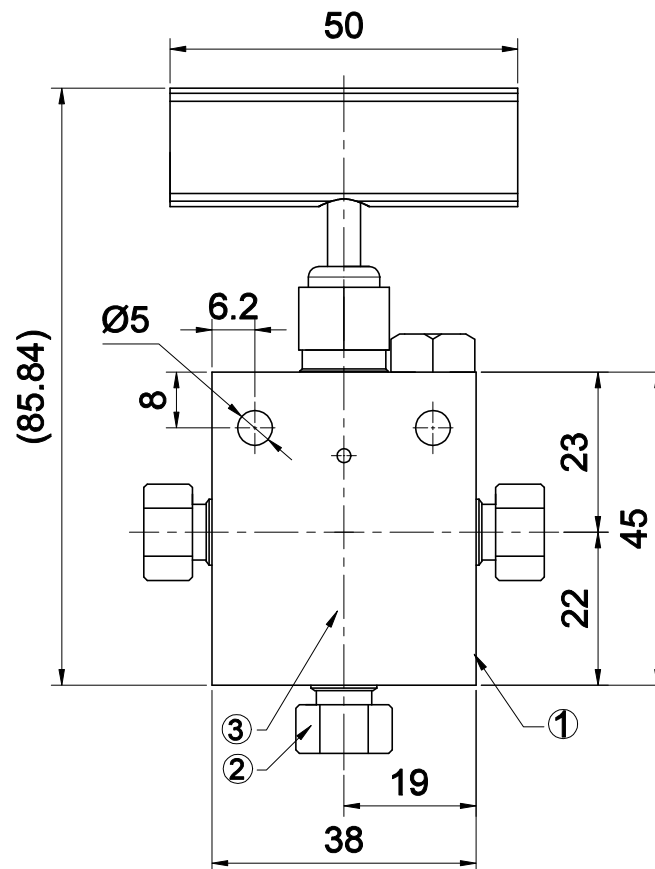



- SPECIFICATIONS

Catalog No.	Pressure Rating(PSI)	Port type	Orifice Size(Ø)	Material
NV15VS02-O	15,000	H1502	1.4	STS316CW

- Note

1. All dimensions for reference only and subject to change.

REV NO.	DESCRIPTION	DRAWING	REVIEWED BY	APPROVED BY
0	FOR APPROVAL	/		
DESIGN SECTION				

Website		Main site : http://www.hiflux.com Shopping mall : http://www.hifluxmall.com					
3	SLEEVE	15,000PSI 1/8"	FA15SS02	STS316CW	3	EA	-
2	GLAND	15,000PSI 1/8"	FA15GS02	STS316CW	3	EA	-
1	NEEDLE VALVE	15,000PSI 1/8"	NV15VS02-O	STS316CW	1	EA	-
ITEM	NAME OF PART	SPEC	Catalog No.	MATERIAL	QUANTITY	UNIT	REMARK
PART CODE		DESCRIPTION		MATERIAL LIST FOR ONE SET			
MATERIAL LIST FOR ONE SET							
No indication chamfer 0.2~0.4 X 45°		UNIT: MM		PROJECT			
General tolerance is given in KS B ISO 2768-1		 		TITLE			
NOMINAL DIM.(MM)		CLASS OF FINISH		LOW PRESSURE NEEDLE VALVE			
OVER	UNDER	TOL.		NEEDLE VALVE 3WAY/1ON			
0.5	6	±0.1	✓ = 20S, ~	15,000PSIG 1/8"			
6	30	±0.2	✓ = 12S, ~	APPD BY			
30	120	±0.3	✓ = 12S, ~	CHD BY			
120	315	±0.5	✓ = 12S, ~	DED BY			
315	1000	±0.8	✓ = 12S, ~	DRN BY			
1000	2000	±1.2	✓ = 12S, ~	WORK NO.			
OVER 2000		±1.5	✓ = 12S, ~	H-KYJ-280208-01			
				SCALE		REV. NO.	
				1:1		05, 2023	
				DWG NO.		NV15VS02-O	
				HIFLUX®			