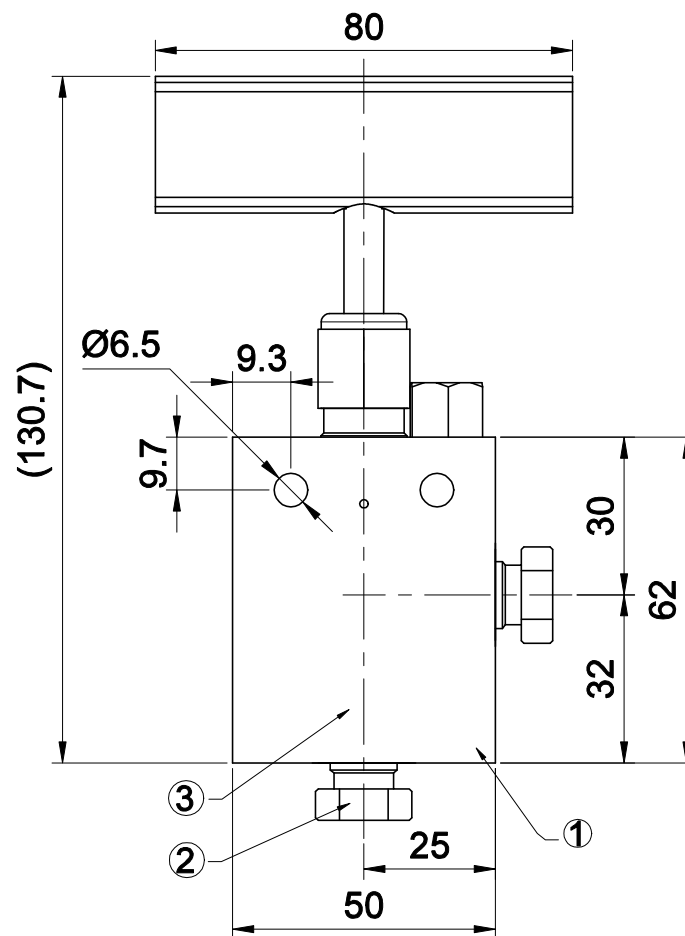



- SPECIFICATIONS

Catalog No.	Pressure Rating(PSI)	Port type	Orifice Size(Ø)	Material
NV15VS04-A	15,000	H1504	3.2	STS16CW

- Note

1. All dimensions for reference only and subject to change.

REV NO.	DESCRIPTION	DRAWING	REVIEWED BY	APPROVED BY
0	FOR APPROVAL	/		
DESIGN SECTION				

Website		Main site : http://www.hiflux.com Shopping mall : http://www.hifluxmall.com					
3	SLEEVE	15,000PSI 1/4"	FA15SS04	STS316CW	2	EA	-
2	GLAND	15,000PSI 1/4"	FA15GS04	STS316CW	2	EA	-
1	NEEDLE VALVE	15,000PSI 1/4"	NV15VS04-A	-	1	EA	-
ITEM	NAME OF PART	SPEC	Catalog No.	MATERIAL	QUANTITY	UNIT	REMARK
PART CODE		DESCRIPTION		MATERIAL LIST FOR ONE SET			
No indication chamfer 0.2-0.4 X 45°		UNIT: MM		PROJECT			
General tolerance is given in KS B ISO 2768-1		CLASS OF FINISH		TITLE			
NOMINAL DIM.(MM)		OVER UNDER TOL.		NEEDLE VALVE ANGLE			
0.5	6	±0.1	✓ = 200S, ~	15,000PSIG 1/4"			
6	30	±0.2	✓ = 12S, 50S, ▽	APPD BY: K.Y.J. CHD BY: K.Y.J. DED BY: K.Y.J. DRN BY: K.Y.J. WORK NO. HI-KYJ-200725-01			
30	120	±0.3	✓ = 12S, 50S, ▽	SCALE 1:1			
120	315	±0.5	✓ = 12S, 50S, ▽	DRN DATE 07, 2023			
315	1000	±0.8	✓ = 12S, 50S, ▽	DWG NO. NV15VS04-A			
1000	2000	±1.2	✓ = 12S, 50S, ▽	REV. NO. 0			
OVER 2000		±1.5	✓ = 12S, 50S, ▽	HIFLUX®			