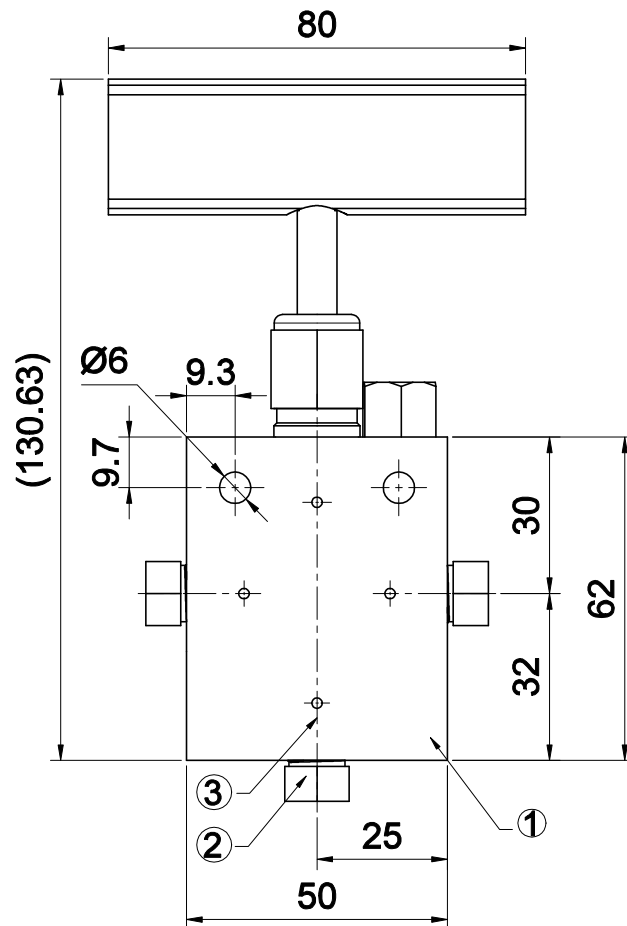



- SPECIFICATIONS

Catalog No.	Pressure Rating(PSI)	Port type	Orifice Size(Ø)	Material
NV20RS04-O	20,000	H2004	3.2	STS16CW

- Note

1. All dimensions for reference only and subject to change.

REV NO.	DESCRIPTION	DRAWING	REVIEWED BY	APPROVED BY
0	FOR APPROVAL	/		
DESIGN SECTION				

Website		Main site : http://www.hiflux.com Shopping mall : http://www.hifluxmall.com					
3	COLLAR	20,000PSI 1/4"	FA20RS04	STS316CW	3	EA	-
2	GLAND	20,000PSI 1/4"	FA20GS04	STS316CW	3	EA	-
1	NEEDLE VALVE	20,000PSI 1/4"	NV20RS04-O	-	1	EA	-
ITEM	NAME OF PART	SPEC	Catalog No.	MATERIAL	QUANTITY	UNIT	REMARK
PART CODE		DESCRIPTION		MATERIAL LIST FOR ONE SET			
No indication chamfer 0.2-0.4 X 45°		UNIT: MM		PROJECT			
General tolerance is given in KS B ISO 2768-1		CLASS OF FINISH		MEDIUM PRESSURE NEEDLE VALVE			
NOMINAL DIM.(MM)		TITLE		NEEDLE VALVE STRAIGHT			
OVER UNDER TOL.		20,000PSIG 1/4"		APPD BY			
0.5	6	±0.1	✓ = 200S, ~	CHD BY	DED BY	DRN BY	WORK NO.
6	30	±0.2	✓ = 12S, ~	K.Y.J	K.Y.J	K.Y.J	HI-KYG-220715-08
30	120	±0.3	✓ = 12S, ~	SCALE		DRN DATE	DWG NO.
120	315	±0.5	✓ = 12S, ~	1:1		07, 2022	HI-KYG-220715-08
315	1000	±0.8	✓ = 12S, ~				
1000	2000	±1.2	✓ = 12S, ~				
OVER 2000		±1.5	✓ = 12S, ~				