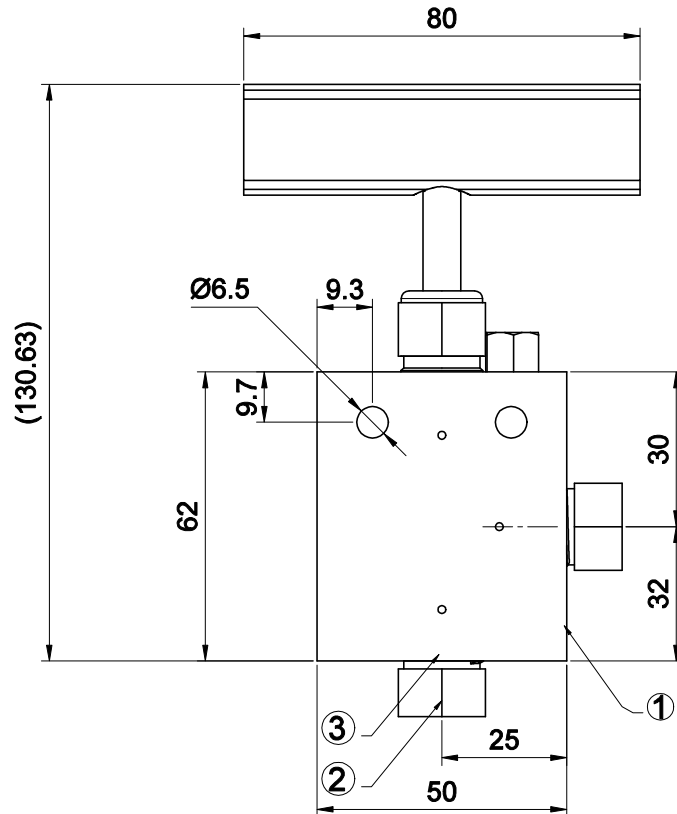




- SPECIFICATIONS

Catalog No.	Pressure Rating(Psi)	Port type	Orifice Size(Ø)	Material
NV20VS04-A	20,000	H2004	3.2	STS316CW

- Note

1. All dimensions for reference only and subject to change.

REV NO.	DESCRIPTION	DRAWING	REVIEWED BY	APPROVED BY
0	FOR APPROVAL	/		
DESIGN SECTION				

Website		Main site : http://www.hiflux.com Shopping mail : http://www.hifluxmail.com					
3	COLLAR	20,000PSI 1/4"	FA20RS04	STS316CW	2	EA	-
2	GLAND	20,000PSI 1/4"	FA20GS04	STS316CW	2	EA	-
1	NEEDLE VALVE	20,000PSI 1/4"	NV20V804-A	-	1	EA	-
ITEM	NAME OF PART	SPEC	Catalog No.	MATERIAL	QUANTITY	UNIT	REMARK
PART CODE		DESCRIPTION		FOR ONE SET		REMARK	
MATERIAL LIST FOR ONE SET							
No indication chamfer 0.2-0.4 X 45°		UNIT: MM		PROJECT MEDIUM PRESSURE NEEDLE VALVE			
General tolerance is given in KS B ISO 2768-1				TITLE NEEDLE VALVE ANGLE			
NOMINAL DIM.(MM)				20,000PSIG 1/4"			
OVER	UNDER	TOL.	CLASS OF FINISH		APPD BY		
0.5	6	±0.1	✓ = 124, 200S, ~		CHD BY	DED BY	DRN BY
6	30	±0.2	✓ = 124, 50S, ~		L&J	L&J	L&J
30	120	±0.3	✓ = 124, 12.5S, ~		SCALE	DRN DATE	WORK NO.
120	315	±0.5	✓ = 124, 3.2S, ~		1:1	08, 2023	H4-L&J-230807-01
315	1000	±0.8	✓ = 124, 0.8S, ~		DWG NO.		REV. NO.
1000	2000	±1.2	✓ = 124, 0.8S, ~		H4-L&J-230807-01		0
OVER 2000		±1.5			HIFLUX®		

HIFLUX®