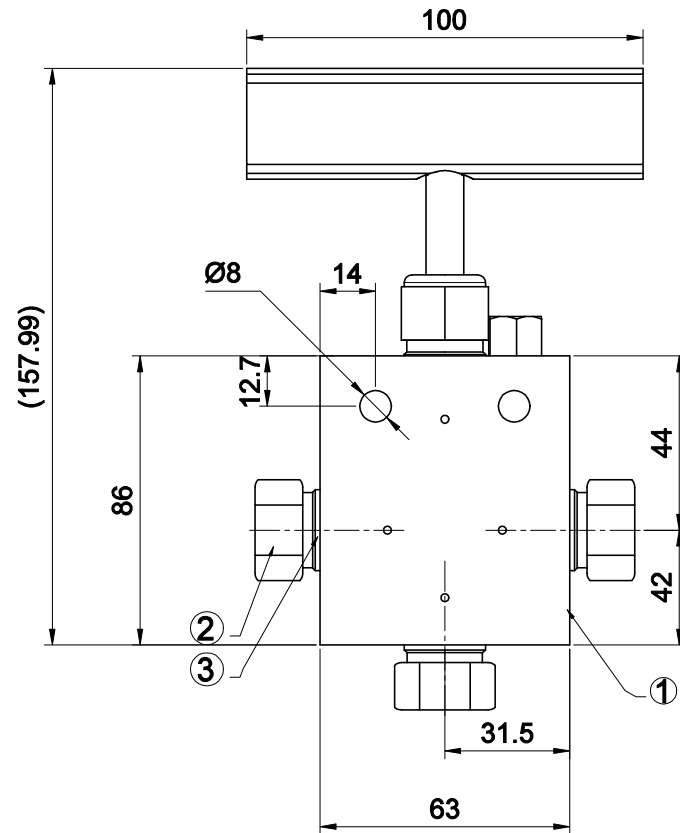



- SPECIFICATIONS

Catalog No.	Pressure Rating(Psi)	Port type	Orifice Size(Ø)	Material
NV20VS09-O	20,000	H2009	7.9	STS316CW

- Note

1. All dimensions for reference only and subject to change.

REV NO.	DESCRIPTION	DRAWING	REVIEWED BY	APPROVED BY
0	FOR APPROVAL	/		
DESIGN SECTION				

Website		Main site : http://www.hiflux.com Shopping mail : http://www.hifluxmail.com					
3	COLLAR	20,000PSI 9/16"	FA20RS09	STS316CW	3	EA	-
2	GLAND	20,000PSI 9/16"	FA20GS09	STS316CW	3	EA	-
1	NEEDLE VALVE	20,000PSI 9/16"	NV20VS09-O	-	1	EA	-
ITEM	NAME OF PART	SPEC	Catalog No.	MATERIAL	QUANTITY	UNIT	REMARK
PART CODE		DESCRIPTION		FOR ONE SET		REMARK	
MATERIAL LIST FOR ONE SET							
No indication chamfer 0.2-0.4 X 45°		UNIT: MM		PROJECT			
General tolerance is given in KS B ISO 2768-1				MEDIUM PRESSURE NEEDLE VALVE			
NOMINAL DIM.(MM)				TITLE			
		CLASS OF FINISH		NEEDLE VALVE 3WAY 10N			
OVER	UNDER	TOL.		20,000PSIG 9/16"			
0.5	6	±0.1	✓ = √, 200S, ~	APPD BY	CHD BY	DED BY	DRN BY
6	30	±0.2	W = √, 50S, ∇	L.B.J	L.B.J	L.B.J	L.B.J
30	120	±0.3	X = √, 12.5S, ∇	SCALE	DRN DATE	WORK NO.	REV. NO.
120	315	±0.5	Y = √, 3.2S, ∇	1:1	08, 2023	H1-L&J-230807-01	
315	1000	±0.8	Z = √, 0.8S, ∇	DWG NO.		H1-L&J-230807-01	
1000	2000	±1.2					
OVER 2000		±1.5					