
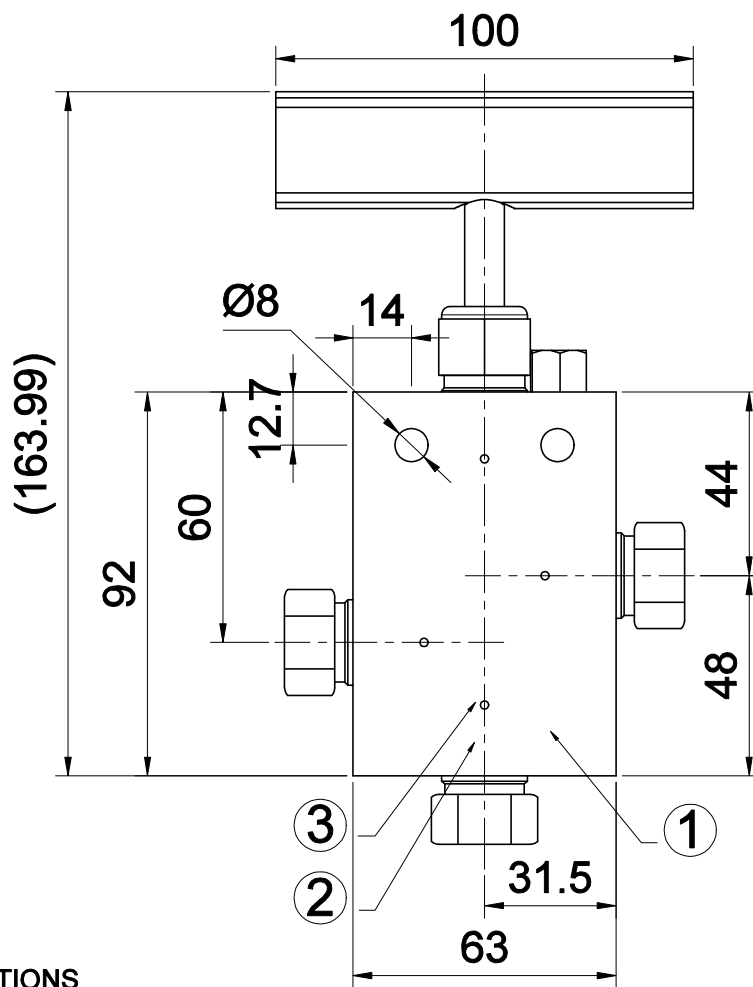




- SPECIFICATIONS

Catalog No.	Pressure Rating(PSI)	Port type	Orifice Size(Ø)	Material
NV20VS09-T	20,000	H2009	7.9	STS316CW

- Note

1. All dimensions for reference only and subject to change.

REV NO.	DESCRIPTION	DRAWING	REVIEWED BY	APPROVED BY
0	FOR APPROVAL	/		
DESIGN SECTION				

Website		Main site : http://www.hiflux.com Shopping mall : http://www.hifluxmall.com					
3	COLLAR	20,000PSI 9/16"	FA20RS09	STS316CW	3	EA	-
2	GLAND	20,000PSI 9/16"	FA20GS09	STS316CW	3	EA	-
1	NEEDLE VALVE	20,000PSI 9/16"	NV20VS09-T	-	1	EA	-
ITEM	NAME OF PART	SPEC	Catalog No.	MATERIAL	QUANTITY	UNIT	REMARK
PART CODE		DESCRIPTION		MATERIAL LIST FOR ONE SET			
No indication chamfer 0.2~0.4 X 45°		UNIT: MM		PROJECT			
General tolerance is given in KS B ISO 2768-1		CLASS OF FINISH		MEDIUM PRESSURE NEEDLE VALVE			
NOMINAL DIM.(MM)		TITLE		NEEDLE VALVE 3WAY 2ON			
OVER UNDER TOL.		CLASS OF FINISH		20,000PSIG 9/16"			
0.5	6	±0.1	✓ = 200S, ~	APPD BY	CHD BY	DED BY	DRN BY
6	30	±0.2	✓ = 12S, 50S, ~	K.Y.J	K.Y.J	K.Y.J	K.Y.J
30	120	±0.3	✓ = 12S, 12.5S, ~	SCALE	DRN DATE	DWG NO.	WORK NO.
120	315	±0.5	✓ = 3.2S, ~	1:1	10, 2023	NV20VS09-T	HI-KYB-231008-01
315	1000	±0.8	✓ = 0.8S, ~	HIFLUX®			
1000	2000	±1.2	✓ = 0.8S, ~				
OVER 2000		±1.5	✓ = 0.8S, ~				