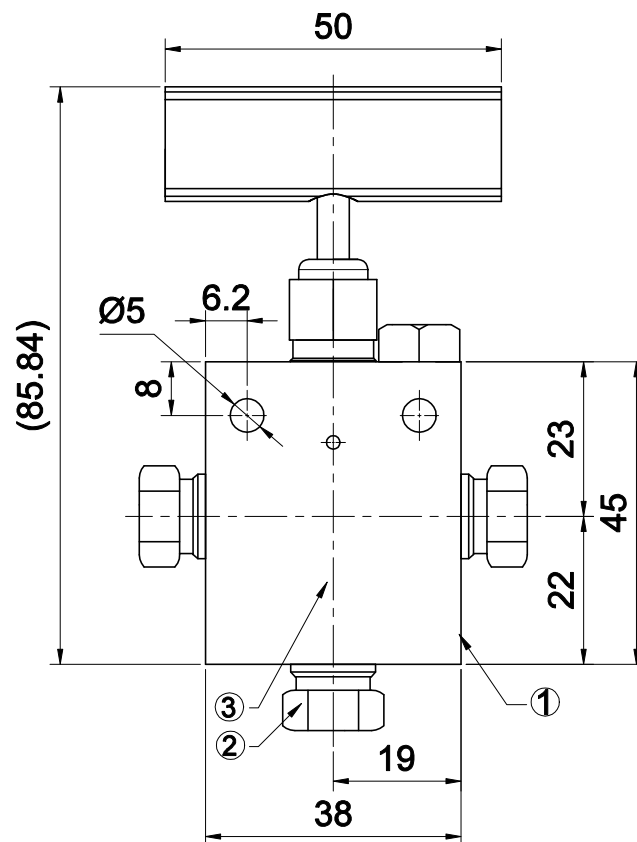



— SPECIFICATIONS

Catalog No.	Pressure Rating(PSI)	Port type	Orifice Size(ϕ)	Material
NV30RS02-O	30,000	H3002	1.6	STS316CW

— Note

1. All dimensions for reference only and subject to change.

REV NO.	DESCRIPTION	DRAWING	REVIEWED BY	APPROVED BY
0	FOR APPROVAL			
DESIGN SECTION				

Website		Main site : http://www.hiflux.com Shopping mall : http://www.hifluxmall.com					
3	COLLAR	30,000PSI 1/8"	FA30RS02	STS316CW	2	EA	-
2	GLAND	30,000PSI 1/8"	FA30GS02	STS316CW	2	EA	-
1	NEEDLE VALVE	30,000PSI 1/8"	NV30RS02-O	-	1	EA	-
ITEM	NAME OF PART	SPEC	Catalog No.	MATERIAL	QUANTITY	UNIT	REMARK
PART CODE		DESCRIPTION		FOR ONE SET			
MATERIAL LIST FOR ONE SET							
No indication chamfer 0.2~0.4 X 45°		UNIT: MM		PROJECT			
General tolerance is given in KS B ISO 2768-1				LOW PRESSURE NEEDLE VALVE			
NOMINAL DIM.(MM)		CLASS OF FINISH		TITLE			
OVER	UNDER	TOL.	✓ =  , 200S, ~	NEEDLE VALVE 3WAY/10N			
0.5	6	±0.1	✓ =  , 50S, ▽	30,000PSIG 1/8"			
6	30	±0.2	✓ =  , 12.5S, ▽▽	APPROD BY			
30	120	±0.3	✓ =  , 3.2S, ▽▽▽	CHD BY	DET BY	DRN BY	WORK NO.
120	315	±0.5	✓ =  , 0.8S, ▽▽▽▽	KY.J	KY.J	KY.J	H-KYJ-230111-11
315	1000	±0.8		SCALE	DRN DATE	DWG NO.	REV. NO.
1000	2000	±1.2		1:1	01, 2023	NV30RS02-O	0
OVER 2000		±1.5		HIFLUX®			

HIFLUX®