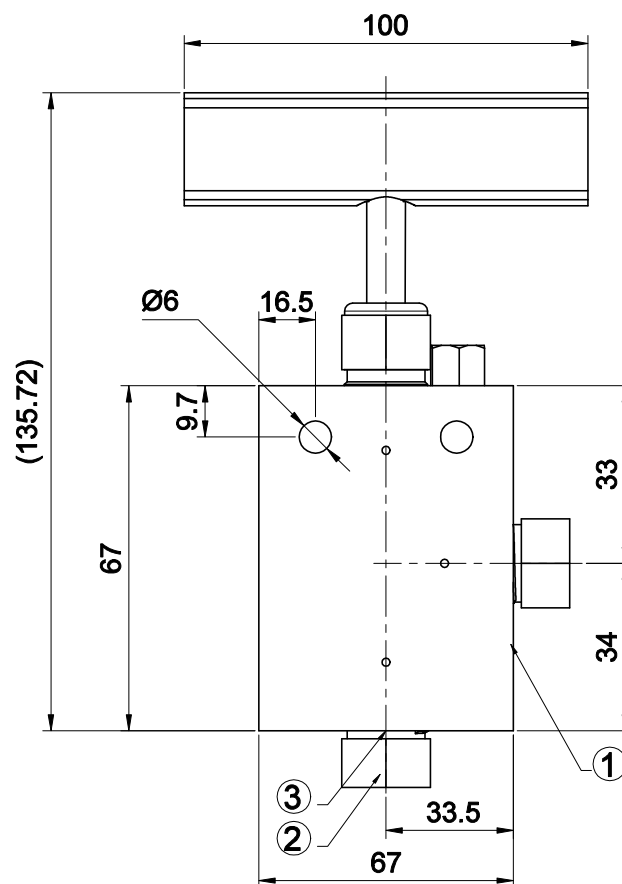




— SPECIFICATIONS

Catalog No.	Pressure Rating(PSI)	Port type	Orifice Size(ϕ)	Material
NV30VS09-A	30,000	H3009	3.2	STS316CW

— Note

1. All dimensions for reference only and subject to change.

REV NO.	DESCRIPTION	DRAWING	REVIEWED BY	APPROVED BY
0	FOR APPROVAL			

Website		Main site : http://www.hiflux.com Shopping mall : http://www.hifluxmall.com					
3	COLLAR	30,000PSI 9/16"	FA30RS09	STS316CW	2	EA	-
2	GLAND	30,000PSI 9/16"	FA30GS09	STS316CW	2	EA	-
1	NEEDLE VALVE	30,000PSI 9/16"	NV30VS09-A	-	1	EA	-
ITEM	NAME OF PART	SPEC	Catalog No.	MATERIAL	QUANTITY	UNIT	REMARK
PART CODE		DESCRIPTION		FOR ONE SET			
MATERIAL LIST FOR ONE SET							
No indication chamfer 0.2~0.4 X 45°		UNIT: MM		PROJECT HIGH PRESSURE NEEDLE VALVE			
General tolerance is given in KS B ISO 2768-1				TITLE NEEDLE VALVE ANGLE			
NOMINAL DIM.(MM)		CLASS OF FINISH		30,000PSIG 9/16"			
OVER	UNDER	TOL.	✓ =  , 200S, ~	APPROD BY	CHD BY	DET BY	DRN BY
0.5	6	±0.1	✓ =  , 50S, ▽	L.S.J	L.S.J	L.S.J	L.S.J
6	30	±0.2	✓ =  , 12.5S, ▽				
30	120	±0.3	✓ =  , 3.2S, ▽				
120	315	±0.5	✓ =  , 0.8S, ▽				
315	1000	±0.8					
1000	2000	±1.2					
OVER 2000		±1.5					
DESIGN SECTION				SCALE 1:1			
				DRN DATE 04, 2022			
				WORK NO. H-I&J-220406-01			
				DNG NO. NV30VS09-A			
				REV. NO. 0			
				HIFLUX®			