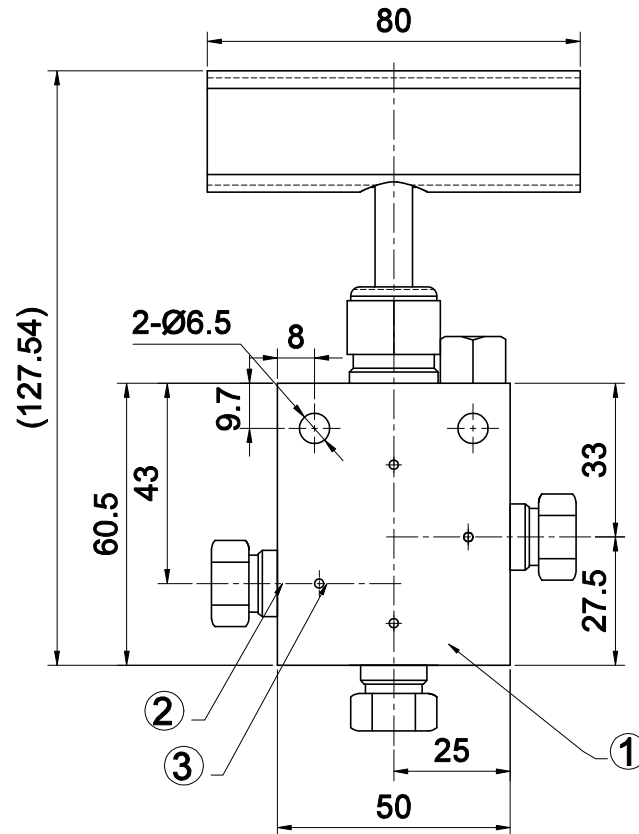




SPECIFICATIONS

Catalog No.	Pressure Rating(PSI)	Port type	Orifice Size(ϕ)	Material
NV60VS04-T	60,000	H6004	2	STS316CW

Note

- All dimensions for reference only and subject to change.

REV NO.	DESCRIPTION	DRAWING	REVIEWED BY	APPROVED BY
0	FOR APPROVAL			
DESIGN SECTION				

Website		Main site : http://www.hiflux.com Shopping mall : http://www.hifluxmall.com					
3	COLLAR	60,000PSI 1/4"	FA60RS04	STS316CW	3	EA	-
2	GLAND	60,000PSI 1/4"	FA60GS04	STS316CW	3	EA	-
1	NEEDLE VALVE	60,000PSI 1/4"	NV60V804-T	-	1	EA	-
ITEM	NAME OF PART	SPEC	Catalog No.	MATERIAL	QUANTITY	UNIT	REMARK
PART CODE		DESCRIPTION		FOR ONE SET			
MATERIAL LIST FOR ONE SET							
No indication chamfer 0.2-0.4 X 45°		UNIT: MM		PROJECT			
General tolerance is given in KS B ISO 2768-1				HIGH PRESSURE NEEDLE VALVE			
NOMINAL DIM.(MM)				TITLE			
OVER		CLASS OF FINISH		NEEDLE VALVE 3WAY - 2 ON			
0.5	6	±0.1	✓ = 200S, ~	60,000PSIG 1/4"			
6	30	±0.2	✓ = 124, 50S, ▽	APPROD BY		CHD BY	
30	120	±0.3	✓ = 124, 50S, ▽	KY.J		KY.J	
120	315	±0.5	✓ = 124, 50S, ▽	DET BY		DRN BY	
315	1000	±0.8	✓ = 124, 50S, ▽	KY.J		KY.J	
1000	2000	±1.2	✓ = 124, 50S, ▽	SCALE		DATE	
OVER 2000		±1.5	✓ = 124, 50S, ▽	1:1		01, 2024	
				DWG NO.		NV60V804-T	
				REV. NO.		0	
				HIFLUX®			