
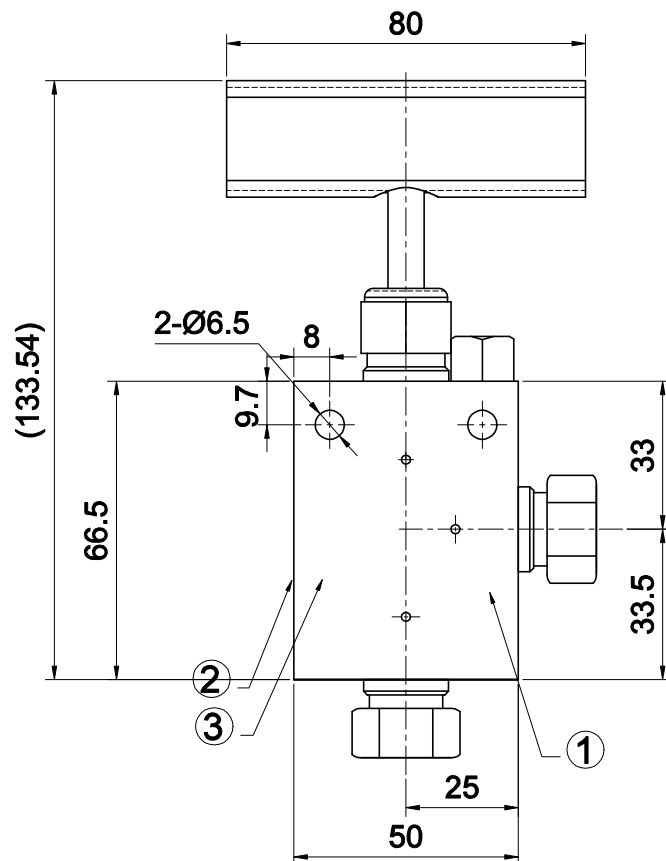




- SPECIFICATIONS

Catalog No.	Pressure Rating(PSI)	Port type	Orifice Size(Ø)	Material
NV60VS06-A	60,000	H6006	2	STS316CW

- Note

1. All dimensions for reference only and subject to change.

REV NO.	DESCRIPTION	DRAWING	REVIEWED BY	APPROVED BY
0	FOR APPROVAL	/		

Website		Main site : http://www.hiflux.com Shopping mall : http://www.hifluxmall.com					
3	COLLAR	60,000PSI 3/8"	FA80RS06	STS316CW	2	EA	-
2	GLAND	60,000PSI 3/8"	FA80GS06	STS316CW	2	EA	-
1	NEEDLE VALVE	60,000PSI 3/8"	NV60VS06-A	-	1	EA	-
ITEM	NAME OF PART	SPEC	Catalog No.	MATERIAL	QUANTITY	UNIT	REMARK
PART CODE		DESCRIPTION		FOR ONE SET			
MATERIAL LIST FOR ONE SET							
No indication chamfer 0.2~0.4 X 45°		UNIT: MM		PROJECT			
General tolerance is given in KS B ISO 2768-1				HIGH PRESSURE NEEDLE VALVE			
NOMINAL DIM.(MM)				TITLE			
				NEEDLE VALVE ANGLE			
				60,000PSIG 3/8"			
OVER	UNDER	TOL.	CLASS OF FINISH				
0.5	6	±0.1	✓ = 0.8, 200S, ~				
6	30	±0.2	✓ = 1.2, 50S, ▽				
30	120	±0.3	✓ = 1.6, 12.5S, ▽				
120	315	±0.5	✓ = 2.0, 3.2S, ▽				
315	1000	±0.8	✓ = 2.5, 0.8S, ▽				
1000	2000	±1.2					
OVER 2000		±1.5					
APPROVED BY		DESIGN SECTION		SCALE			
				1:1			
				DRN DATE			
				06, 2021			
				DWG NO.			
				NV60VS06-A			
				REV. NO.			
				2			



HIFLUX®