
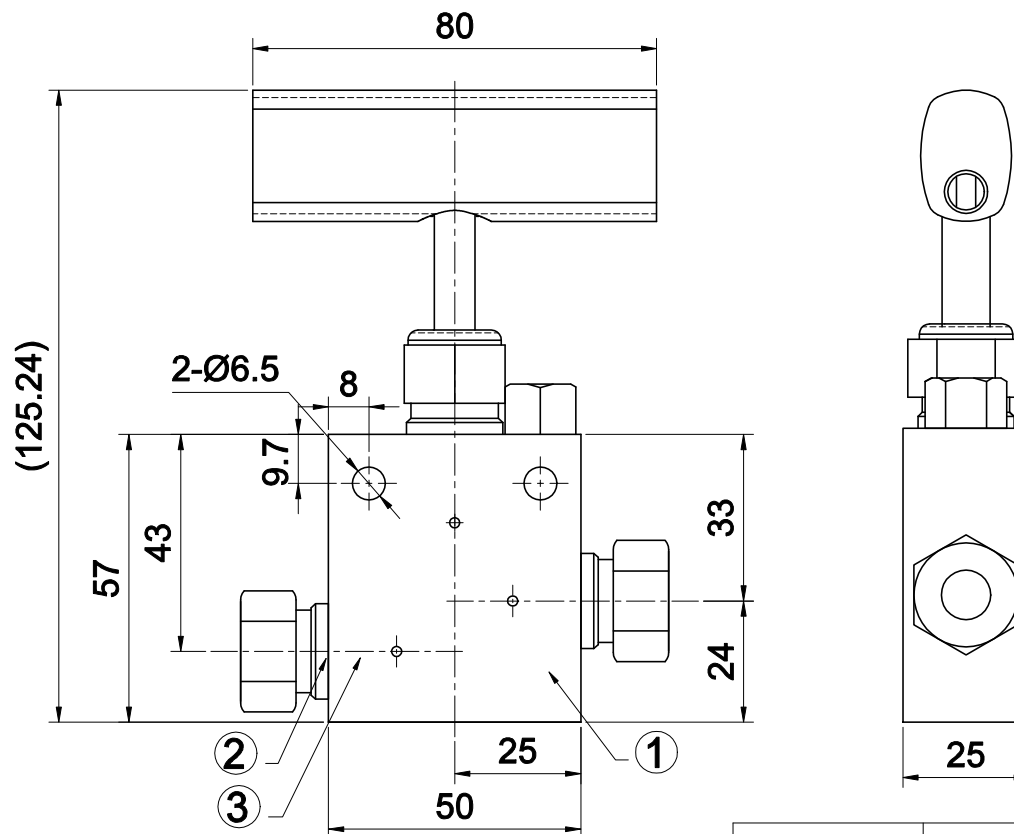




— SPECIFICATIONS

Catalog No.	Pressure Rating(PSI)	Port type	Orifice Size(φ)	Material
NV60VS06-S	60,000	H6006	2	STS316CW

— Note

1. All dimensions for reference only and subject to change.

REV NO.	DESCRIPTION	DRAWING	REVIEWED BY	APPROVED BY
0	FOR APPROVAL			

Website		Main site : http://www.hiflux.com Shopping mall : http://www.hifluxmall.com					
3	COLLAR	60,000PSI 3/8"	FA80RS06	STS316CW	2	EA	-
2	GLAND	60,000PSI 3/8"	FA80GS06	STS316CW	2	EA	-
1	NEEDLE VALVE	60,000PSI 3/8"	NV60VS06-S	-	1	EA	-
ITEM	NAME OF PART	SPEC	Catalog No.	MATERIAL	QUANTITY	UNIT	REMARK
	PART CODE				FOR ONE SET		
MATERIAL LIST FOR ONE SET							
No indication chamfer 0.2~0.4 X 45°			UNIT: MM		PROJECT		
General tolerance is given in KS B ISO 2768-1					HIGH PRESSURE NEEDLE VALVE		
NOMINAL DIM.(MM)					TITLE		
					NEEDLE VALVE STRAIGHT		
					60,000PSIG 3/8"		
OVER	UNDER	TOL.	CLASS OF FINISH		APPD BY	CHD BY	DET BY
0.5	6	±0.1	✓ = 0/ , 200S, ~		L.S.J	L.S.J	L.S.J
6	30	±0.2	✓ = 12/ , 50S, ▽				
30	120	±0.3	✓ = 12/ , 12.5S, ▽				
120	315	±0.5	✓ = 12/ , 3.2S, ▽				
315	1000	±0.8	✓ = 12/ , 0.8S, ▽				
1000	2000	±1.2					
OVER 2000		±1.5					
					SCALE	1:1	DRN DATE
							12, 2023
					WORK NO.	H-I&J-231227-02	REV. NO.
							1
					DWG NO.	NV60VS06-S	
					HIFLUX®		