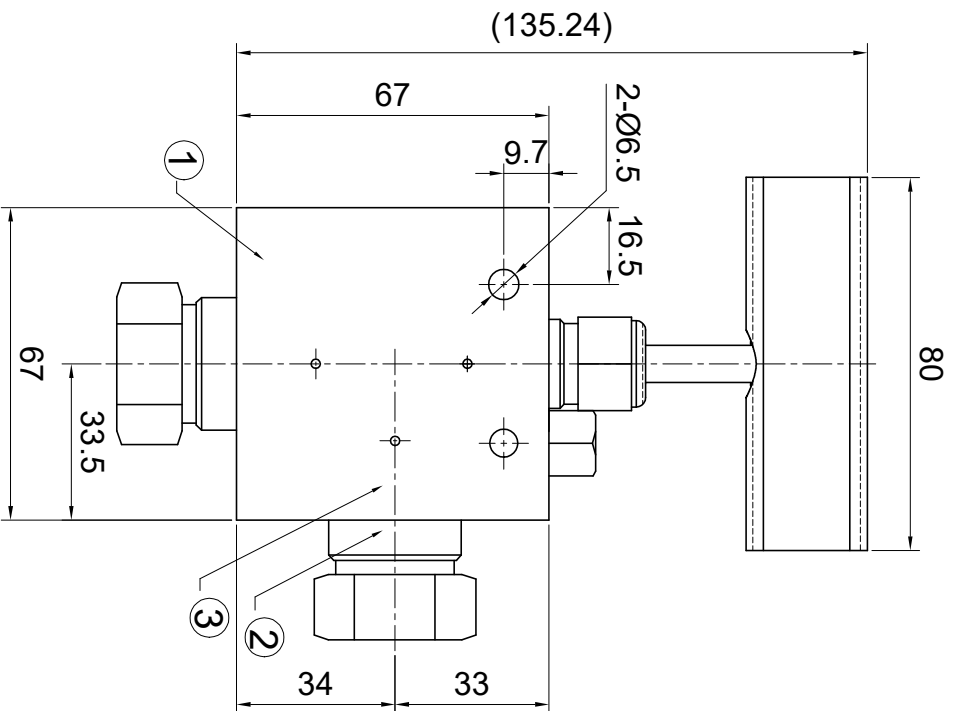



SPECIFICATIONS

Catalog No.	Pressure Rating(Psi)	Port type	Office Size(ϕ)	Material
NV60V/S09-A	60,000	H6009	2	STS316CW

— Note

1. All dimensions for reference only and subject to change.

REV NO.	DESCRIPTION	DRAWING	REVIEWED BY	APPROVED BY
0	FOR APPROVAL	/		

Website		Main site : http://www.hiflux.com Shopping mall : http://www.hifluxmall.com					
3	COLLAR	60,000PSI 9/16"	FA60RS09	2	EA	-	
2	GLAND	60,000PSI 9/16"	FA60GS09	2	EA	-	
1	NEEDLE VALVE	60,000PSI 9/16"	NV60V/S09-A	1	EA	-	
ITEM	NAME OF PART	SPEC	Catalog No.	MATERIAL	QUANTITY	UNIT	REMARK
PART CODE		DESCRIPTION					
MATERIAL LIST FOR ONE SET							
No indication diameter 0.2~0.4 X 45°							
General tolerance is given in KS B ISO 2768-1							
NOMINAL DIM.(MM)							
OVER	UNDER	TOL.	CLASS OF FINISH				
0.5	6	±0.1	√ = √, 200S,	√ = √, 50S,	√ = √, 12.5S,	√ = √, 3.2S,	√ = √, 0.8S, √
6	30	±0.2	√ = √, 50S,	√ = √, 12.5S,	√ = √, 3.2S,	√ = √, 0.8S,	√
120	120	±0.3	√ = √, 12.5S,	√ = √, 3.2S,	√ = √, 0.8S,	√ = √, 0.8S,	√
315	315	±0.5	√ = √, 3.2S,	√ = √, 0.8S,	√ = √, 0.8S,	√ = √, 0.8S,	√
1000	1000	±0.8	√ = √, 0.8S,	√ = √, 0.8S,	√ = √, 0.8S,	√ = √, 0.8S,	√
2000	2000	±1.2	√ = √, 0.8S,	√ = √, 0.8S,	√ = √, 0.8S,	√ = √, 0.8S,	√
OVER 2000		±1.5	√ = √, 0.8S,	√ = √, 0.8S,	√ = √, 0.8S,	√ = √, 0.8S,	√
UNIT: MM							
PROJECT							
HIGH PRESSURE NEEDLE VALVE							
TITLE							
NEEDLE VALVE ANGLE							
60,000PSIG 9/16"							
APPROV BY							
CHD BY	DEB BY	DRN BY	WORK NO.	REV NO.			
K.V.J	K.V.J	K.V.J	HA4241162-05				
SCALE		DATE		DWG NO.			
1:1		11.2021		NV60V/S09-A			
REV NO.							
△							

hiflux®